
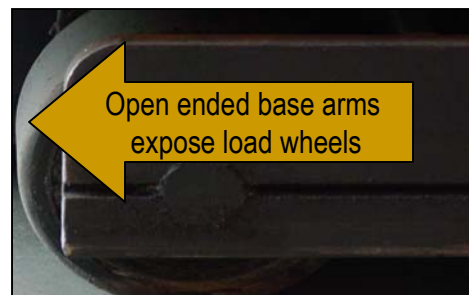
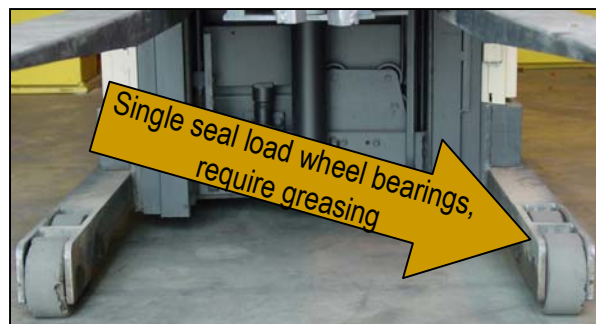
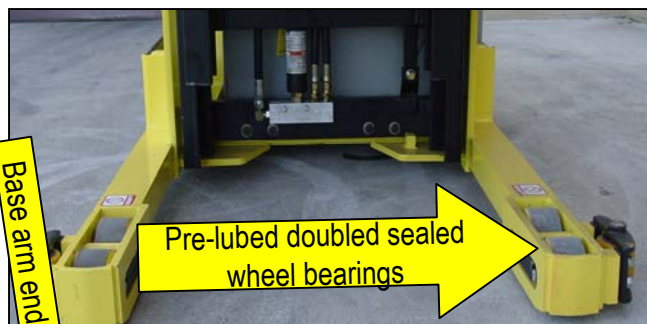


REDUCED MAINTENANCE COSTS, RELIABILITY



Hyster load wheels and base arm end caps

Crown load wheels and base arm end caps

FEATURE	HYSTER	CROWN	BENEFIT
Load Wheel Bearings	The load wheel bearings used on the Hyster R30XM ₂ are a pre-lubed double sealed bearing. Pre-lubed double sealed bearings are greased when manufactured and sealed to keep lubricants in and contamination out. Basically a maintenance free wheel bearing.	The Crown SP3020-30 does not utilize pre-lubed double sealed wheel bearings. The load wheels must be greased during maintenance PM's (preventative maintenance) checks. Non sealed bearings are much more susceptible to contamination.	  The R30XM₂ order picker with double sealed, pre lubricated wheel bearings eliminate bearing greasing and protect the wheel bearings from moisture, dirt and other contamination. The protective load wheel end-caps protect the load wheels from physical damage. These innovative designs reduce maintenance costs and improve reliability.
Load Wheel Endcaps	The Hyster order picker basearms feature protective load wheel end-caps. The end-caps help protect the load wheels from damage.	The Crown SP3020-30 basearms do not feature load wheel end-caps. Without the end-caps, the load wheels are left exposed and are prone to damage, especially with the platform raised.	